

TOTO

TECHNICAL DATA SHEET

AL-OMRAN Trading Co.

Riyadh – Saudi Arabia
Website: alomrantrd.com

Tel: 0593851408

WhatsApp: 0595333434

Email: project@alomran.sa

DIGITAL CATALOGUE
SCAN HERE



PRODUCT DETAILS

Type	Water closet
Item Code	CS911VT + TCF87220GAA +T53WRVL
Range	NEOREST LS1 (Black)
Material	Vitreous China
Colour	White

Technical Details and Description :

TOTO - NEOREST LS I Water Closet Bowl
(S-trap) (rough in:305mm)
Nickel remote

ENVIRONMENTAL & TECHNICAL DATA

Flow Rate	3.8 L / 3L
------------------	------------

Flow Chart : Not Applicable

Exquisite streamlined design
Dainty design detail in black with matching remote controller
AIR-IN WONDER WAVE provides various cleansing modes to suit everyone's needs
PREMIST prevents waste from clinging
EWATER+ suppresses the accumulation of waste
TORNADO FLUSH swirls and ejects waste entirely
RIMLESS leaves no place for waste to hide
CEFIONTECT forces waste to slide down
Equipped with many more features which provide a comfortable experience for all users
Size: 725 x 411 x 497mm
Flushing System: Tornado
Water Consumption: 3L/3.8L
Trap Type (Rough-In): S-Trap (305mm)
Water Pressure: 0.05Mpa ~ 0.75Mpa
Power Rating: AC220V
Material: Bowl - Vitreous China, Seat & Cover - Plastic,
Remote Controller - Aluminum Black
Color: White
Remarks: P-trap (120-130mm) also available

CERTIFICATION / STANDARDS


Warranty	1 Year
Standards	TOTO Industrial Standards(JIS)

REMARKS

IMAGE



TECHNICAL DRAWING

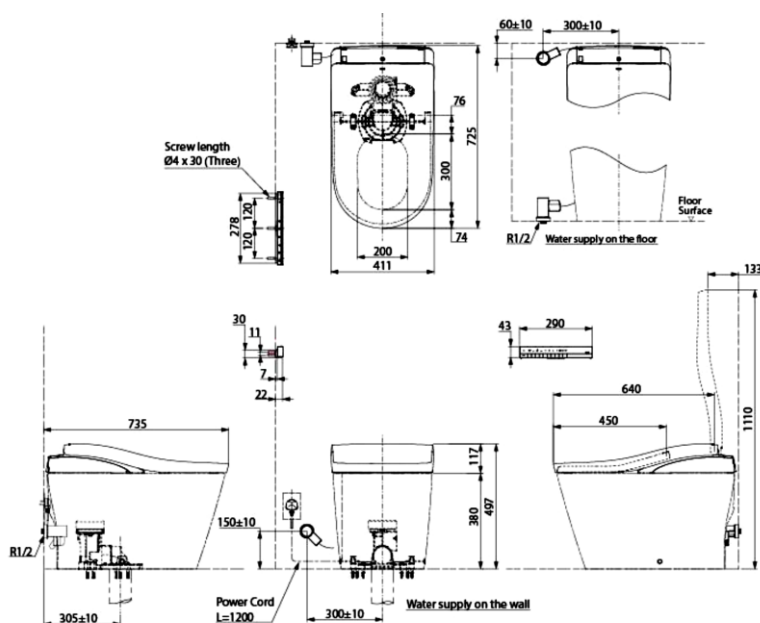

Note: Dashed lines are not part of product.

COMPONENTS

Note: All recommended installation dimension are for reference only.



TOTO

TECHNICAL DATA SHEET

AL-OMRAN Trading Co.

Riyadh – Saudi Arabia
Website: alomrantrd.com

Tel: 0593851408
WhatsApp: 0595333434
Email: project@alomran.sa

DIGITAL CATALOGUE
SCAN HERE



PRODUCT DETAILS

Type	Water closet
Item Code	CS911VT + TCF87220GAA + T53WRVL
Range	NEOREST LS1 (Black)
Material	Vitreous China
Colour	White

Technical Details and Description :

TOTO - NEOREST LS I Water Closet Bowl
(S-trap) (rough in:305mm)
Nickel remote

ENVIRONMENTAL & TECHNICAL DATA

Flow Rate	3.8 L / 3L
-----------	------------

Flow Chart : Not Applicable

- New TORNADO FLUSH uses less water to produce powerful streams of water that travels along a hairpin curve of new RIMLESS DESIGN bowl creating a 360 degree of cleaning power that washes every spot
- PREMIST, a fine spray of mist making it difficult for dirt to adhere
- EWATER+ not only keeps toilet bowl and nozzle clean by preventing bacterial with sanitizing effect but is also sprayed under the seat to prevent other accumulated waste, ensures a long-lasting cleanliness
- Automatic operation: Lid opens, closes and toilet flushes when sensor is activated
- AIR-IN WONDERWAVE uses air rich water droplets to produce comfortable cleaning sensation
- HEATED SEAT with temperature control
- Auto powerful DEODORIZER activates after every usage
- Adjustable WARM AIR DRYING
- Hybrid Ecology System- WATER SAVING

CERTIFICATION / STANDARDS

Warranty	1 Year
Standards	TOTO Industrial Standards(JIS)

REMARKS

IMAGE



TECHNICAL DRAWING

Important Note

- Do not use other water than allowed by the laws and ordinances of the region of use. Only use portable water.

Do not use seawater or recycled water.

- This is an electrical product. Do not install it anywhere water is likely to get on the product or anywhere with humidity high enough that water is likely to form on the surface of this product. When using the product in a bathroom, install a fan or ventilation port and ensure good air flow through the bathroom.
- If the controller is not being used over a certain period of time, the batteries in the controller are highly recommended to be removed. Batteries in the remote controller are recommended to be replaced on a yearly basis.
- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

Note: Dashed lines are not part of product.

COMPONENTS

Note: All recommended installation dimension are for reference only.